



## A MONEY BOX

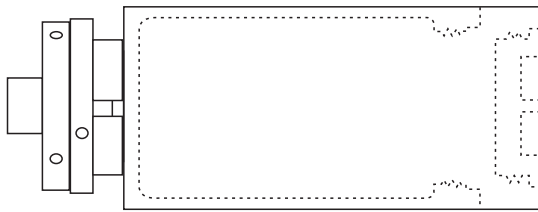

Mount the chosen wood between centres and round it off. Make a spigot on the end that is to be the top of the money box. Mount it in a chuck.

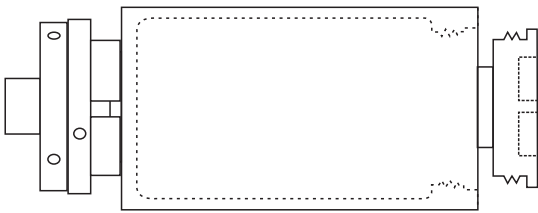

Make the threads and reliefs around the lid. Leave a lip so that it will close neatly.



Close-up the thread should have small flats instead of a point.




Sand and finish all surfaces of the lid.

Mark a circle with a soft pencil where the centre points of the drilled finger holes are to be.


Part off and drill those holes.

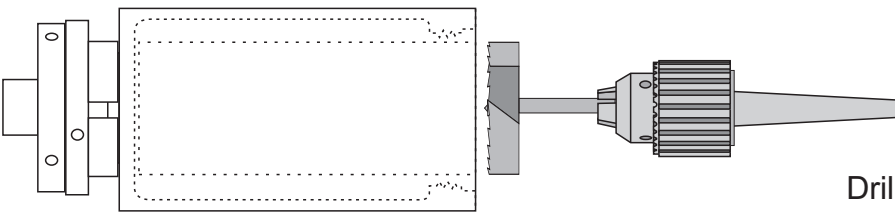

Drill the inside to the desired depth

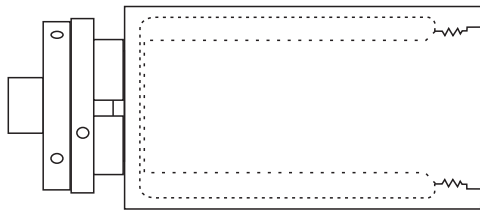


Cut the lip area, and space for the flange of the lid, to the desired diameter. Make a thread to match the thread on the lid.

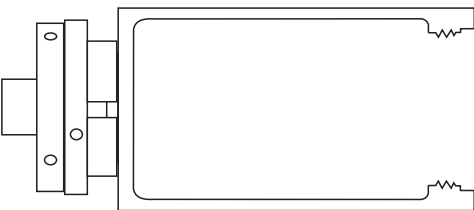

Hollow the inside. Sand and finish all of the inside and flats of the base.

Mark on the outside the depth of the hollowing or where to cut the top.

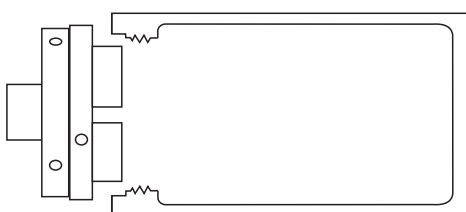

Turn the wood around and re-mount on a jam chuck or long jaws. Finish the top. Mark the location of the coin slot. It may also be easiest to cut the coin slot while the work is held securely on the lathe.

Sand and finish all surfaces.